



## 240W UFO Lepro High Bay Light



### Product Features

- 1000W metal halide lamp equivalent. UP to 145lm/w, Save 66% on electricity bill.
- 5 years warranty.
- Dimmable. Work with 0-10V dimmer.
- Input voltage: 120-277V AC. Up to 6KV surge protection.
- UL DLC5.1 certified. Opportunity to get rebates.
- Protection Rating: IP65, IK10

**Product Information**

SKU	350011-NW-US	EAN Code	4894495039456
Color Consistency (SDCM)	<5	Power Consumption (W)	240
Brightness (lm)	34,800	Metal Halide Equivalent(W)	1000
LED Quantity	720	Surge protection	4KV(L-N) , 6KV(L/N-PE)
Dimmable	0-10 V	Input Voltage (v)	120-277V AC
Beam Angle (Degree)	90	Diameter (in)	14.1
Frequency (hz)	50/60	Height (in)	7.4
CRI	>80	Net Weight (lb)	8.16
Color Temperature (K)	5000	Safety certificate	UL
Power Factor	>0.9	Energy certificate	DLC 5.1
Lifespan (h)	50,000	Warranty	5 Years
Waterproof	Yes	Package Quantity	Pack of 1 Unit

**Recommended 0-10 V Dimmer**

Brand	Lutron	Leviton	Legrand
Dimmer Type	0-10 V	0-10 V	0-10 V
Model	NTSTV-DV/NFTV-IV/DVTV-WH	DS710-10Z/IP710	RH4FBL3PW

**Product Dimensions**



Photometric Data

[Download IES](#)


### OUTDOOR PHOTOMETRIC REPORT

**MANUFACTURER:** Lepro  
**SKU NO.:** 350011-NW-US  
**CATALOG:** 4894495039456  
**DESCRIPTION:** UFO Highbay 240W 5000K 34800lm IP65 IK10 BK  
**LAMP:** LED 5000K / CRI >= 80  
**LAMP OUTPUT:** 1 lamp, rated Lumens/lamp: 34800  
**INPUT WATTAGE:** 240  
**LUMINOUS OPENING:** Circular (Dia: 11.42")  
**NEMA TYPE:** 6 X 6  
**MAX CD:** 17,694.0 at Horizontal: 90°, Vertical: 13°  
**CUTOFF CLASS:** Cutoff  
**ROADWAY CLASS:** Type VS  
**EFFICIENCY:** 100%


#### LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-10	1,684.0	4.8%
10-20	4,972.4	14.3%
20-30	7,593.5	21.8%
30-40	8,210.4	23.6%
40-50	6,205.5	17.8%
50-60	3,479.6	10.0%
60-70	1,659.7	4.8%
70-80	694.0	2.0%
80-90	145.5	0.4%

#### Polar Candela Distribution

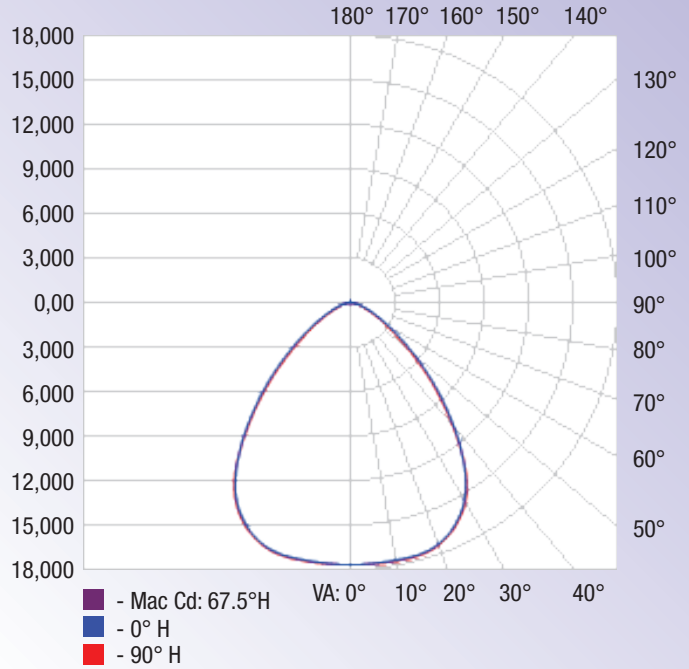

#### Isofootcandle Plot

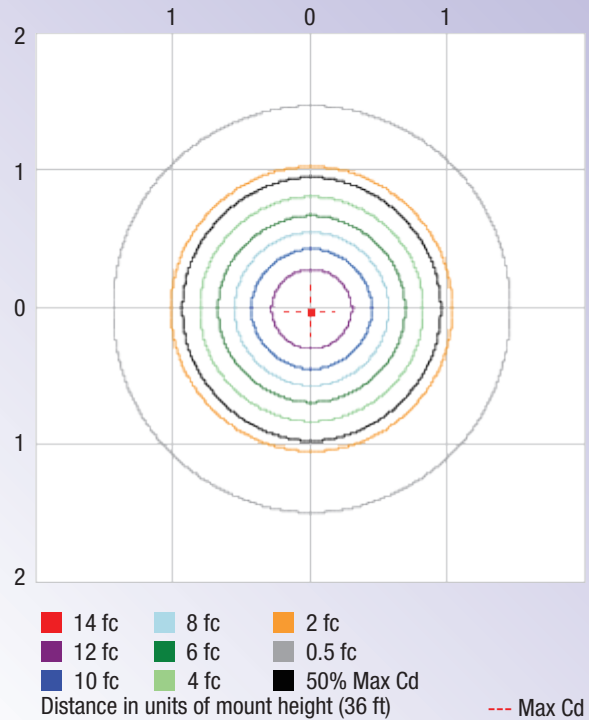

#### ILLUMINANCE AT A DISTANCE

	Center Beam	Beam Spread	
6 ft	490.52 fc	11.3 ft	10.8 ft
12 ft	122.63 fc	22.6 ft	21.7 ft
18 ft	54.50 fc	33.9 ft	32.5 ft
24 ft	30.66 fc	45.2 ft	43.4 ft
30 ft	19.62 fc	56.5 ft	54.2 ft
36 ft	13.63 fc	67.8 ft	65.0 ft

■ Horiz. Spread: 86.6°    ■ Vert. Spread: 84.2°

**Other Models**

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	Equivalent Power(w)	DLC	Website
350009-NW-US	100	14,500	5,000K	120-277 V	90°	50,000	80	250	5.1	<a href="#">Visit</a>
350010-NW-US	150	21,750	5,000K	120-277 V	90°	50,000	80	400	5.1	<a href="#">Visit</a>
350011-NW-US	240	34,800	5,000K	120-277 V	90°	50,000	80	1000	5.1	<a href="#">Visit</a>



**350009-NW-US  
100 W**



**350010-NW-US  
150 W**



**350011-NW-US  
240 W**

