



165W Dimmable Linear LED High Bay Light



Product Features

- DLC certified. Opportunity to get rebates. UL certified. 5 years warranty.
- 400W metal halide lamp equivalent. Save 60% on electricity bill.
- Dimmable. Work with 1-10V dimmer.
- Input voltage: 120-277 V AC. Anti-surge protection.
- Come with rope sling. Easy to install.


Product Information

SKU	350012-NW-US	Color Consistency (SDCM)	<6
Power Consumption (W)	165	Brightness (lm)	23100
Metal Halide Equivalent(W)	400	LED Quantity	504
Light Color	Neutral White	Color Temperature (K)	5000
Dimmable	Dimmable	CRI	80
Beam Angle (Degree)	90	Input Voltage (v)	120-277V AC
Frequency (hz)	50/60	Power Factor	>0.9
Lifespan (h)	50000	Length (in)	24.80
Width (in)	11.81	Height (in)	1.89
Net Weight (lb)	7.94	Material	PMMA, SPCC
Waterproof	No	Protection Rating	IP20
Safety Rating	UL, FCC	Package Quantity	Pack of 1 Unit
Warranty	5 Years	Energy Rating	DLC5.1

Recommended 1-10 V Dimmer

Brand	Lutron	Leviton	Legrand
Dimmer Type	1-10 V	1-10 V	1-10 V
Model	NTSTV-DV	DS710-10Z/IP710	RH4FBL3PW

Product Dimensions

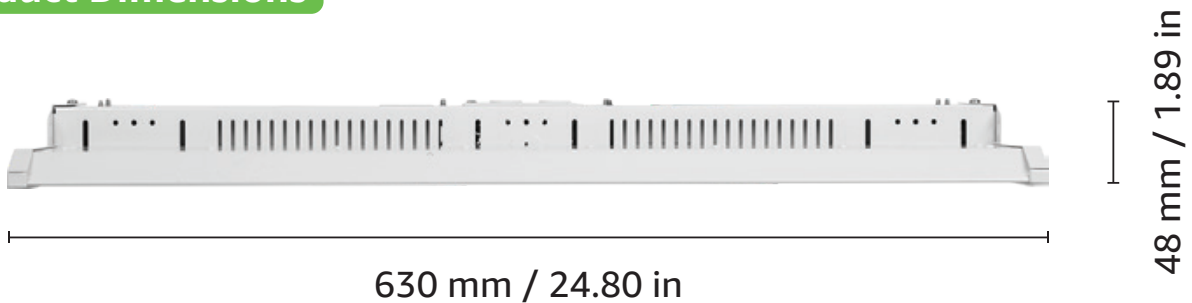

Photometric Data

[Download IES](#)


OUTDOOR PHOTOMETRIC REPORT

MANUFACTURER: Lepro
SKU NO.: 350012-NW-US
LAMP OUTPUT: 1 lamp, rated Lumens/lamp: 23100
MAX CANADELA: 11,742.8 at Horizontal: 67.5°, Vertical: 1°
LUMINOUS OPENING: Rectangle (L: 0.6M, W: 0.28M)
NEMA TYPE: 6 X 6

LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-10	1,110.5	4.8%
10-20	3,176.0	13.8%
20-30	4,804.7	20.8%
30-40	5,574.1	24.1%
40-50	3,866.9	16.7%
50-60	2,051.6	8.9%
60-70	1,283.5	5.6%
70-80	800.1	3.5%
80-90	261.9	1.1%

Polar Candela Distribution

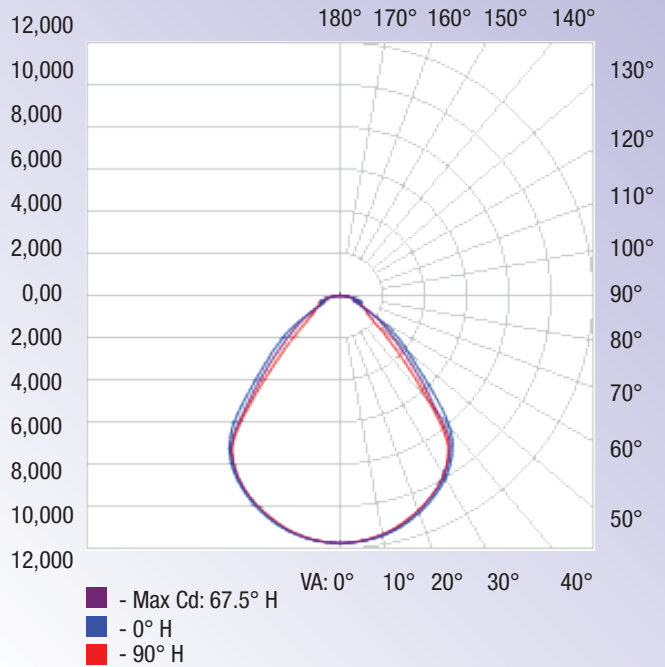


ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH
4 ft	733.69 fc	7.0 ft 8.0 ft
8 ft	183.42 fc	14.0 ft 15.9 ft
12 ft	81.52 fc	21.0 ft 23.9 ft
16 ft	45.86 fc	28.0 ft 31.8 ft
20 ft	29.35 fc	35.0 ft 39.8 ft

Vert. Spread: 82.4° Horiz. Spread: 89.7°

Isofootcandle Plot

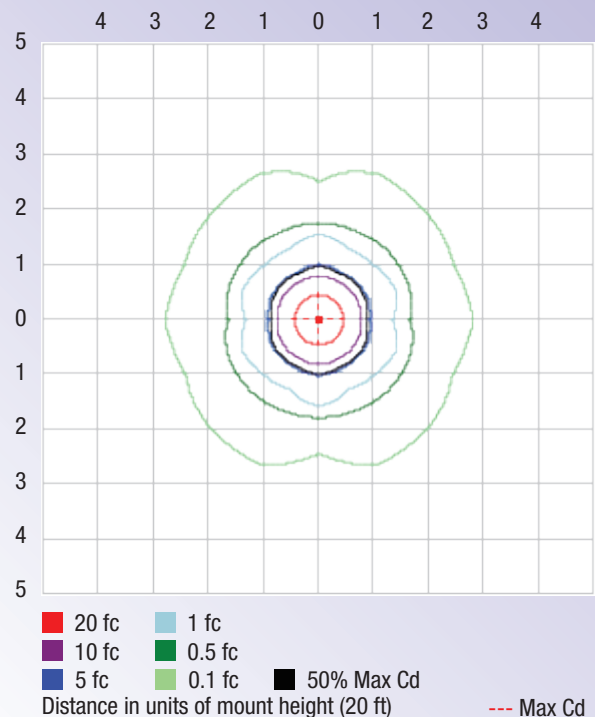

Other Models

SKU	Power (w)	Lumen (lm)	CCT	Input Voltage	Beam Angle	Life Hrs	CRI	MH Equivalent Power (w)	DLC	Website
350012-NW-US	165	23,100	5000 K	120-277 V	90°	50,000	80	400	5.1	Visit
350013-NW-US	220	30,800	5000 K	120-277 V	90°	50,000	80	500	5.1	Visit



350012-NW-US
165 W



350013-NW-US
220 W

