



80w Light Sensor LED Wall Pack Light



Product Features

- Light sensor included, Lamp turns on/off automatically due to light.
- 300W Metal Halide Equivalent, Save 70% energy, Anti-surge protection.
- Input voltage: 120-277 V AC, Waterproof IP65, Flicker-free.
- Lumileds LED inside, 5 year warranty.

Product Information

SKU	630002-NW-US	EAN Code	4894495032495
Color Consistency (SDCM)	<6	Power Consumption (W)	80
Brightness (lm)	10000	Metal Halide Equivalent (W)	300
LED Quantity	280	Color Temperature (K)	5000
Ambient Light Sensor	ON < 25 Lux; OFF > 100 Lux	CRI	80
Beam Angle (Degree)	110	Input Voltage (v)	120-277V AC
Frequency (hz)	50/60	Power Factor	>0.9
Lifespan (h)	50000	Length (in)	14.21
Width (in)	9.25	Height (in)	9.92
Net Weight (lb)	6.61	Material	Aluminum
Waterproof	Yes	Protection Rating	IP65
Safety Rating	UL	Package Quantity	Pack of 1 Unit
Warranty	5 Years		

Product Dimensions



Photometric Data

[Download IES](#)


OUTDOOR PHOTOMETRIC REPORT

MANUFACTURER: Lepro
SKU NO.: 630002-NW-US
LAMP OUTPUT: 1 lamp, rated Lumens / lamp: 10268.9
MAX CANDELA: 3,759.8 AT HORIZONTAL: 54°, VERTICAL: 1°
LUMINOUS OPENING: Point
NEMA TYPE: 7 X 7


LUMENS PER ZONE

ZONE	LUMENS	% TOTAL
0-30	2,278.6	22.2%
0-40	3,707.4	36.1%
0-60	6,682.3	65.1%
60-90	2,902.5	28.3%
70-100	1,980.9	19.3%
90-120	612.8	6%
0-90	9,584.8	93.3%
90-180	683.7	6.7%
0-180	10,267.5	100%

Polar Candela Distribution

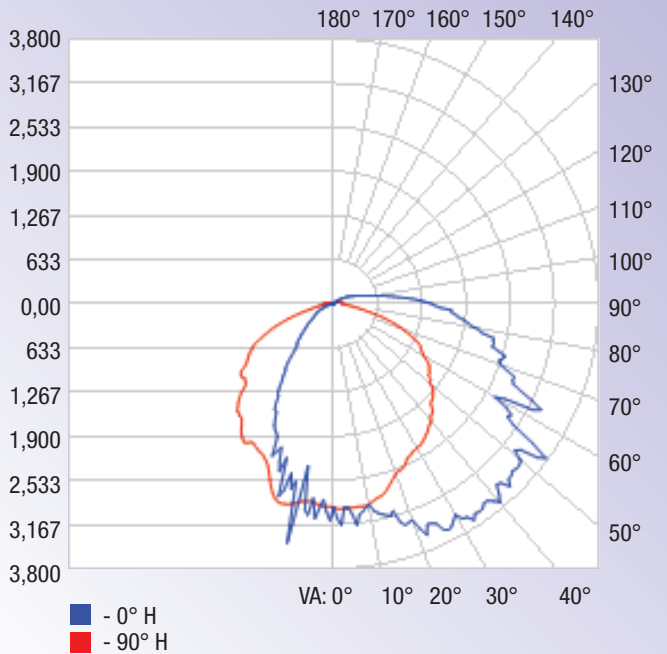

Isofootcandle Plot

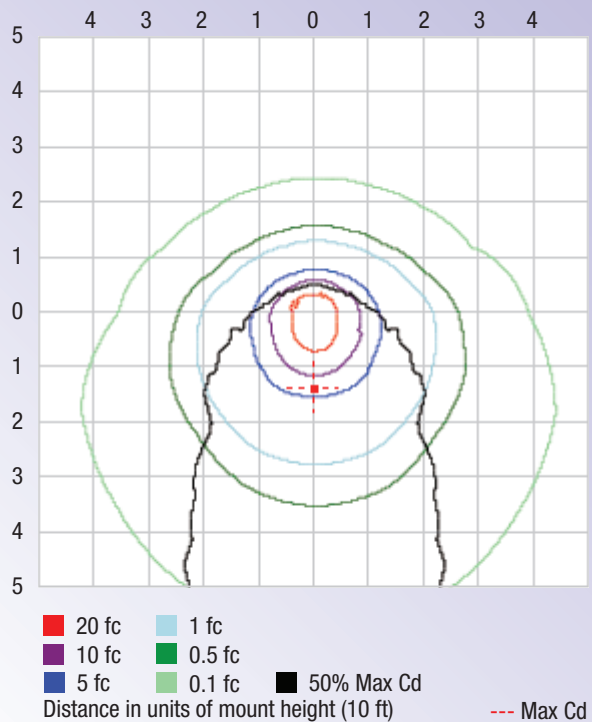

ILLUMINANCE AT A DISTANCE

	CENTER BEAM FC	BEAM WIDTH	
2 ft	730.18 fc	5.4 ft	5.7 ft
4 ft	182.54 fc	10.8 ft	11.5 ft
6 ft	81.13 fc	16.2 ft	17.2 ft
8 ft	45.64 fc	21.6 ft	22.9 ft
10 ft	29.21 fc	27.0 ft	28.7 ft

■ Vert. Spread: 106.9°
 ■ Horiz. Spread: 110.2°

Other Models

SKU	Power (W)	Lumen (lm)	CCT	Voltage	Beam Angle	Life Hrs	CRI	MH Equivalent(W)	Website
630001-NW-US	40	5,000	5000K	120-277V	110°	50,000	80	200	Visit
630002-NW-US	80	10,000	5000K	120-277V	110°	50,000	80	300	Visit
630003-NW-US	120	15,000	5000K	120-277V	110°	50,000	80	400	Visit



630001-NW-US
40 W



630002-NW-US
80 W



630003-NW-US
120 W

