



40W Lepro LED Wall Pack Light with Photocell



Product Features

- Photocell included, automatically turn on/off from dusk to dawn.
- 200W metal halide equivalent, save 70% energy.
- Input voltage: 100-277 V AC. Lumileds LED inside.
- Waterproof IP65. 5 years warranty.
- DLC certified. Available to get rebates.

Product Information

SKU	630009-NW-US	Power Consumption (W)	40
Brightness (lm)	5600	Metal Halide Equivalent (W)	200
LED Quantity	135	Light Color	Neutral White
Color Temperature (K)	5000	Dimmable	Dimmable
CRI	80	Beam Angle (Degree)	100
Input Voltage (v)	100-277V AC	Frequency (hz)	50/60
Power Factor	0.9	Lifespan (h)	50000
Length (in)	10.75	Width (in)	8.26
Height (in)	7.68	Net Weight (lb)	6.17
Material	Glass, Aluminum	Waterproof	Yes
Protection Rating	IP65	Safety Rating	UL, FCC
Package Quantity	Pack of 1 Unit	Warranty	5 Years
Energy Rating	DLC5.1		

Product Dimensions



Photometric Data

[Download IES](#)

OUTDOOR PHOTOMETRIC REPORT

MANUFACTURER: LEPRO
SKU NO.: 630009-NW-US
DESCRIPTION: LED WALL LIGHT 40W IP65 IK06 5,600LM 5000K
LAMP OUTPUT: 1 lamp, rated Lumens/lamp: 5600
INPUT WATTAGE: 40
LUMINOUS OPENING: Point
NEMA TYPE: 7 X 7
MAX CD: 2,064.7 at Horizontal: 22.5°, Vertical: 27°
CUTOFF CLASS: Noncutoff
ROADWAY CLASS: VERY SHORT, TYPE IV
EFFICIENCY: 100%

LUMENS PER ZONE


ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	154.1	2.80%	90-100	258.2	4.60%
10-20	426.8	7.60%	100-110	145.4	2.60%
20-30	609.2	10.90%	110-120	81.3	1.50%
30-40	696.2	12.40%	120-130	42.8	0.80%
40-50	738.3	13.20%	130-140	21.2	0.40%
50-60	751.1	13.40%	140-150	10.4	0.20%
60-70	688.5	12.30%	150-160	3.7	0.10%
70-80	564.3	10.10%	160-170	1.3	0%
80-90	406.5	7.30%	170-180	0.4	0%

ILLUMINANCE AT A DISTANCE


	CENTER BEAM FC	BEAM WIDTH	
4 ft	101.85 fc	10.0 ft	11.4 ft
8 ft	25.46 fc	20.1 ft	22.8 ft
12 ft	11.32 fc	30.1 ft	34.2 ft
16 ft	6.37 fc	40.1 ft	45.6 ft
20 ft	4.07 fc	50.2 ft	57.0 ft

■ Vert. Spread: 102.9° ■ Horiz. Spread: 109.9°

Polar Candela

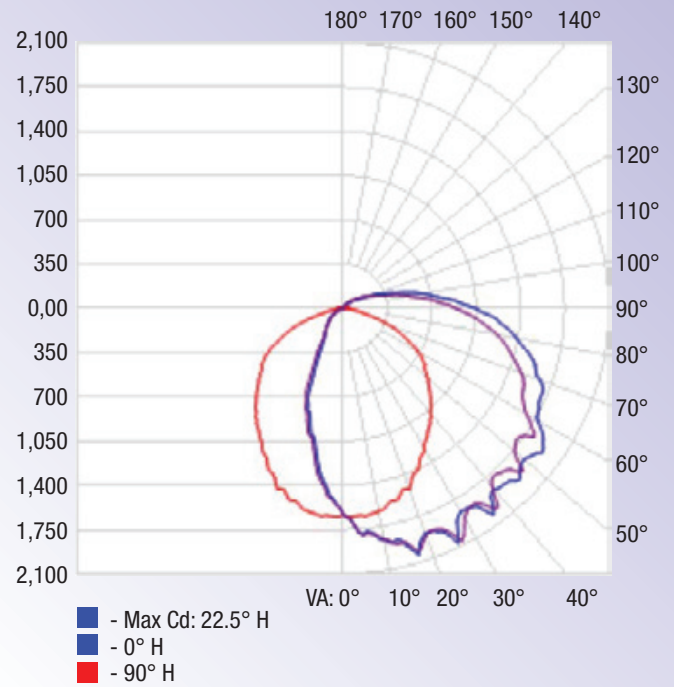

Isofootcandle

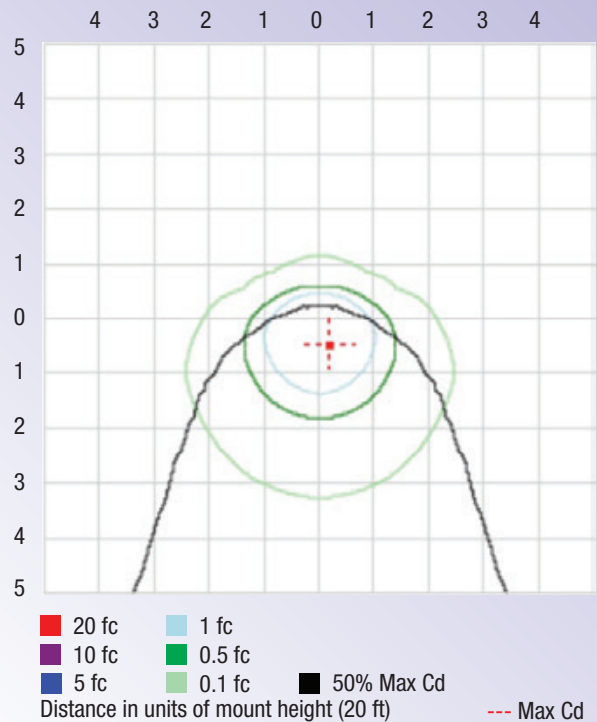

Other Models

SKU	Power (W)	Lumen (lm)	CCT	Voltage	Beam Angle	Life Hrs	CRI	MH Equivalent(W)	DLC	Website
630009-NW-US	40	5,600	5000K	100-277V	100°	50,000	80	200	5.1	Visit
630010-NW-US	80	11,600	5000K	100-277V	100°	50,000	80	400	5.1	Visit
630011-NW-US	120	17,400	5000K	100-277V	100°	50,000	80	600	5.1	Visit



630009-NW-US
40 W



630010-NW-US
80 W



630011-NW-US
120 W

